

## FATENT COOPERATION TREATY

## From the INTERNATIONAL BUREAU

PCT

**NOTIFICATION OF ELECTION**

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C.20231  
ETATS-UNIS D'AMERIQUE

<b>Date of mailing (day/month/year)</b> 26 June 2000 (26.06.00)	in its capacity as elected Office
<b>International application No.</b> PCT/SE99/01964	<b>Applicant's or agent's file reference</b> P 99-714/IJW
<b>International filing date (day/month/year)</b> 01 November 1999 (01.11.99)	<b>Priority date (day/month/year)</b> 02 November 1998 (02.11.98)
<b>Applicant</b>	

**1. The designated Office is hereby notified of its election made:**

in the demand filed with the International Preliminary Examining Authority on:

22 May 2000 (22.05.00)

in a notice effecting later election filed with the International Bureau on:

2. The election  was

1

was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<p><b>The International Bureau of WIPO</b>  <b>34, chemin des Colombettes</b>  <b>1211 Geneva 20, Switzerland</b></p> <p>Facsimile No.: (41-22) 740.14.35</p>	<p><b>Authorized officer</b></p> <p><b>Claudio Borton</b></p> <p>Telephone No.: (41-22) 338.83.38</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :  B27N 3/24		A1	(11) International Publication Number:  <b>WO 00/25999</b>
			(43) International Publication Date:  11 May 2000 (11.05.00)
<p>(21) International Application Number: PCT/SE99/01964</p> <p>(22) International Filing Date: 1 November 1999 (01.11.99)</p> <p>(30) Priority Data: 9803741-9 2 November 1998 (02.11.98) SE</p> <p>(71) Applicant (<i>for all designated States except US</i>): VALMET FIBERTECH AB [SE/SE]; S-851 94 Sundsvall (SE).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (<i>for US only</i>): LUNDGREN, Göran [SE/SE]; Metkrosvägen 2, S-865 91 Alnö (SE). MELANDER, Olof [SE/SE]; Norra Vägen 39, S-856 31 Sundsvall (SE). SCHEDIN, Kurt [SE/SE]; Högålidsgatan 34, S-856 31 Sundsvall (SE).</p> <p>(74) Agents: KARLSSON, Leif et al.; L.A. Groth &amp; Co. KB, P.O. Box 6107, S-102 32 Stockholm (SE).</p>		<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
<p>(54) Title: METHOD AND ARRANGEMENT FOR THE CONTINUOUS PRODUCTION OF LIGNOCELLULOSE-CONTAINING BOARDS</p>			
<p>(57) Abstract</p> <p>The present invention relates to a method and to an arrangement for the continuous production of lignocellulosic boards, wherein material is disintegrated into particles and/or fibres, glued, dried and formed into a mat (1). The mat is pressed in a continuous steam-injection press (2) into board form (3) and then passed through an after-conditioning unit (4). Gaseous emissions and steam occurrent in the press process are captured. Hot air is supplied to prevent condensation of the gaseous emissions and the steam when leakage air from the surroundings is admixed therewith and also to transport the steam and emissions to a combustion plant for combustion.</p>			

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## METHOD AND ARRANGEMENT FOR THE CONTINUOUS PRODUCTION OF LIGNOCELLULOSE-CONTAINING BOARDS

The present invention relates to a method of producing continuously ligno-cellulosic boards in accordance with the preamble of claim 1, and to an arrangement for carrying out the method.

Methods of producing boards from lignocellulose-based raw materials are well known to the art and have found wide use in practice. The manufacture of such boards includes the following main method steps: disintegration of the raw material to fibres and/or particles of appropriate size, drying the particles and/or fibres to a determined moisture ratio and gluing the material either prior to or subsequent to said drying process, shaping the glued material to form a mat, which may comprise several layers, and optionally cold pre-pressing the mat, pre-heating said mat, water-spraying mat surfaces etc., and heat pressing the mat in a discontinuous press or in a continuous press while subjecting the material simultaneously to pressure and heat so as to obtain a finished board.

A well-known problem with present day manufacturing technology, irrespective of whether it involves discontinuous presses or continuous presses, is that gases are generated in the press during the compression process, which takes place at high temperatures. These gases consist of water vapour (steam), different volatile substances dissolved from wood and glue, so-called Volatile Organic Compounds (VOC), and gaseous phenol from wood and glue, etc. It has been found that long-time exposure to these substances results in irritation, and that they are also harmful to personal health when present in sufficiently high concentrations. Consequently, the authorities in the majority of countries in which boards are manufactured in accordance with the aforesaid methods have elaborated a set of rules and regulations that state the emission concentrations that are permitted in work places and the permitted concentrations permitted in emissions to atmosphere.

Since present day press technology involves the use of homogenous heating plates or steel bands, only a minor part of the gases generated in press will leave the boards through their edges in the compression process. However,

the major part of these gases will leave the board as it exits from the press. The influence of these gases on the working environment can be limited to some extent with the aid of protective casings and covers, although air at room temperature is normally used as transport air because of the large size of the presses.

5 Consequently, this air volume will normally exceed the requirement of combustion air in the standard heating plant of the factory. This has necessitated the installation of complicated and expensive equipment in connection with the majority of plants in which lignocellulosic sheets and boards are produced. For instance, the plants will normally include so-called RTO (Regenerated Thermal Oxidizer) units  
10 or scrubber systems for purifying press gases.

The object of the present invention is to provide a method and an arrangement for producing lignocellulosic boards without VOC-emissions or formaldehyde-emissions to the workshop areas concerned and to the ambient environment, and also obviating the need to install expensive purification equipment. This  
15 object is achieved with a method and an arrangement according to the invention that have the characteristic features set forth in respective claims.

The invention will now be described in more detail with reference to the accompanying drawing, which is a schematic longitudinal section view of an arrangement in accordance with the invention.

20 The plant illustrated in the drawing is based on the plants disclosed in SE 502 272 and SE 504 638, which describe two continuous steam-press processes. A fibrous mat 1 previously formed in the manufacturing process is compressed in a continuous steam-injection press 2 to form a board or sheet 3, which is then passed through an after-conditioning unit 4. As the fibre mat 1 passes into the nip  
25 between two steam-injection rolls 5, steam is delivered and injected into the mat through wires 6. The temperature rises very quickly to above 100°C; a typical temperature is above 120°C. The mat is herewith formed into a solid board 3. The pressure falls as the board leaves the nip between the steam-injection rolls 5, and the temperature therewith drops very quickly to about 100°C. This takes place by  
30 virtue of the extremely rapid vaporisation of part of the enclosed moisture. VOC-emissions and formaldehyde-emissions accompany the departing steam.

Because this process takes place between two gas-permeable wires 6, the steam and the gases departing with the steam are able to leave the board across the whole of its width. Steam and other emissions are captured before being able to escape into the workshop area or to ambient atmosphere, by a suction unit 5 8 provided to this end inside the press. Air heated to a temperature in excess of 100°C is transported to this suction unit. The hot air is used together with leakage air from the surroundings as a vehicle gas for the steam and said other emissions. The hot air, leakage air, steam and emissions are transported to a heating plant 9 in the factory, for combustion. A hot air delivery unit 11 is connected to a curing 10 zone 10 in the press 2, and the hot air supplied is then passed to the suction unit 8.

The temperature is maintained at a high level partly to prevent the emissions and the steam from condensing out to the suction system and partly to utilize the fact that the moisture carrying capacity of the air, calculated per kilogram 15 of air, increases with increasing temperatures. This enables the total air volumes and gas volumes to be maintained at levels which do not exceed the volumes of combustion air that are required by the standard plant system to generate the heat and process steam necessary for the production of such board material. Consequently, no other equipment need be installed to prevent emissions to the surroundings. 20

Subsequent to the board having been produced in the continuous steam injection press 2, the board is passed into the after-conditioning unit 4 (see SE 504 638) where a pre-determined volume of air heated to a pre-determined temperature and having a pre-determined moisture content is sucked through the 25 board so as to obtain a desired board moisture content and temperature. The air leaving the after-conditioning unit will also contain emissions of VOC and formaldehyde, although in smaller quantities; measurements taken in a pilot plant have shown that the major part of the emissions occur in the continuous steam-injection press. For this purpose, a suction unit 12 is arranged in the after-conditioning unit 30 4. Air is sucked in at 13 and heated by a heater 14 and is supplied with steam through the conduit 15.

The air leaving the after-conditioning unit is transported to the hot air supply unit 11 of the steam-injection press 2 and its curing zone 10, by means of a suction fan 16. As it passes to the supply unit 11, the air is given additional energy through the medium of a heat exchanger 17. If the air from the after-conditioning 5 unit 4 is in excess, the excess can be mixed with the flow from the press 2 in a closed hood 18 and passed to the heating plant 9. If there is a deficiency of air to the curing zone 10, the suction fan 16 draws-in extra air through the closed hood 18. The air leaving the after-conditioning unit 4 is thus used as hot input air for the internal suction unit 8 of the continuous steam-injection press. Measurements 10 have shown that these volumes are sufficient to fulfil the requisite transport volumes needed for the continuous steam-injection press.

Subsequent to having passed through the after-conditioning unit 4, the board 3 may optionally also be passed through a surface-densifying press in accordance with SE 502 272 (not shown in the drawing). This latter press also includes a special suction unit that functions to capture in said press those emissions that are transported to the combustion plant of the factory with the aid of hot air, for the production of heat and steam.

---

## CLAIMS

1. A method for the continuous production of lignocellulosic boards, in which the material is disintegrated into particle and/or fibre form, glued, dried and formed into a mat (1) which is compressed in a continuous steam-injection press (2) into board form (3) and the board is thereafter passed through an after-conditioning unit (4), **characterized** by capturing steam and gaseous emissions generated in the press process, and supplying hot air to said process for the purpose of preventing condensation of the gaseous emissions and said steam when admixing

10 said emissions and steam with leakage air from the surroundings and also to prevent condensation of said leakage air from the surroundings, and for transporting the emissions to a combustion plant (9) for combustion.

2. A method according to claim 1, **characterized** in that the hot air and the leakage air from the surroundings are supplied in an amount which is at most equal to the amount of combustion air required by the heating plant (9).


3. A method according to claim 1 or 2, **characterized** by supplying to a curing zone (10) in the press (2) air that has a temperature in excess of 100°C.

20 4. A method according to any one of claims 1-3, **characterized** by supplying energy to the suction air from the after-conditioning unit (4) so that the temperature will exceed 100°C, and thereafter using the air as vehicle air for the transportation of emissions from the steam-injection press (2).

25 5. An arrangement for carrying out the method according to any one of claims 1-4, said arrangement including a continuos steam-injection press (2) and an after-conditioning unit (4), **characterized** by a suction unit (8) arranged in the steam-injection press (2) and functioning to capture gaseous emissions and steam and to transport said emissions and steam to a combustion plant (9), and further characterized by a unit (11) for supplying hot air to the suction unit (8).

6. An arrangement according to claim 5, characterized in that the hot air supply unit (11) is connected for air supply purposes to a suction unit (12) in the after-conditioning unit (4), and in that a heater (17) is connected to a transport conduit between said units.

1 / 1

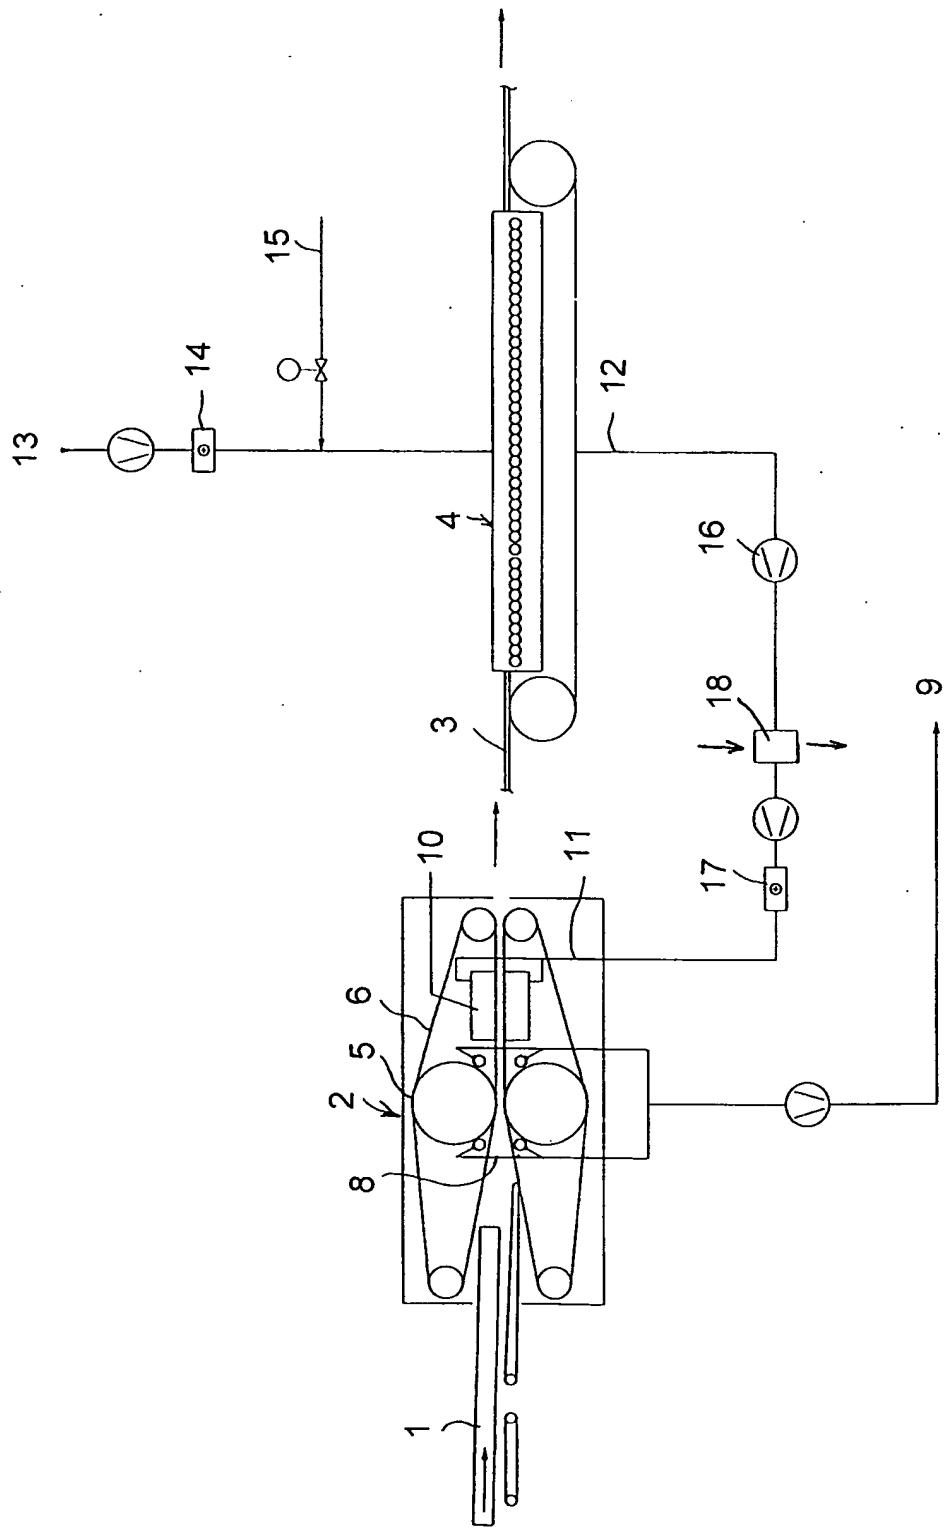

**SUBSTITUTE SHEET (RULE 26)**

## INTERNATIONAL SEARCH REPORT

1

International application No.

PCT/SE 99/01964

## A. CLASSIFICATION OF SUBJECT MATTER

**IPC7: B27N 3/24**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

**IPC7: B27N**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

**SE,DK,FI,NO classes as above**

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SE 502272 A (SUNDS DEFIBRATOR INDUSTRIES AB), 25 Sept 1995 (25.09.95)  --	1
A	SE 9701652 A (SUNDS DEFIBRATOR INDUSTRIES AB), 31 October 1998 (31.10.98)  -----	1

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents	"I"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"J" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search	Date of mailing of the international search report
7 March 2000	08-03-2000
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer  Olov Jensén/ELY Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/12/99

International application No.	
PCT/SE 99/01964	

Patent document cited in search report	Publication date		Patent family member(s)	Publication date
SE 502272 A	25/09/95		AT 182831 T AU 674473 B AU 688758 B AU 1673395 A AU 6390494 A CA 2179503 A CN 1137769 A CZ 282782 B CZ 284373 B CZ 9502491 A CZ 9601972 A DE 69415000 D,T DE 69511242 D EP 0690895 A,B EP 0741635 A,B ES 2134438 T FI 962977 A HU 77664 A HU 9601933 D JP 8508060 T JP 9508328 T NZ 279569 A PL 176748 B PL 310802 A PL 315629 A SE 9400266 A SI 9520019 A SK 89396 A SK 119095 A SK 279254 B US 5749992 A WO 9520473 A	15/08/99 19/12/96 19/03/98 15/08/95 11/10/94 03/08/95 11/12/96 15/10/97 11/11/98 13/03/96 16/10/96 22/04/99 00/00/00 10/01/96 13/11/96 01/10/99 26/07/96 28/07/98 00/00/00 27/08/96 26/08/97 24/11/97 30/07/99 08/01/96 25/11/96 29/07/95 28/02/97 04/12/96 04/06/97 05/08/98 12/05/98 03/08/95
SE 9701652 A	31/10/98		AU 4641097 A EP 0876887 A SE 509089 C	11/05/98 11/11/98 07/12/98

1 15  
PENT COOPERATION TREATY

PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

REC'D 12 MAR 2001  
WIPO PCT

(PCT Article 36 and Rule 70)

14

Applicant's or agent's file reference <b>P 99-714 IJW</b>	<b>FOR FURTHER ACTION</b>	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. <b>PCT/SE99/01964</b>	International filing date ( <i>day/month/year</i> ) <b>01.11.1999</b>	Priority date ( <i>day/month/year</i> ) <b>02.11.1998</b>
International Patent Classification (IPC) or national classification and IPC7 <b>B 27 N 3/24</b>		
Applicant <b>Valmet Fibertech AB et al</b>		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 3 sheets, including this cover sheet.

This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of \_\_\_\_\_ sheets.

3. This report contains indications relating to the following items:

- I  Basis of the report
- II  Priority
- III  Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV  Lack of unity of invention
- V  Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI  Certain documents cited
- VII  Certain defects in the international application
- VIII  Certain observations on the international application

Date of submission of the demand <b>22.05.2000</b>	Date of completion of this report <b>06.03.2001</b>	
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Telex 17978 PATOREG-S	Authorized officer <b>Olov Jensén/ELY</b> Telephone No. 08-782 25 00

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE99/01964

**I. Basis of the report****1. With regard to the elements of the international application:\*** the international application as originally filed the description:

pages \_\_\_\_\_, as originally filed

pages \_\_\_\_\_, filed with the demand

pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_

 the claims:

pages \_\_\_\_\_, as originally filed

pages \_\_\_\_\_, as amended (together with any statement) under article 19

pages \_\_\_\_\_, filed with the demand

pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_

 the drawings:

pages \_\_\_\_\_, as originally filed

pages \_\_\_\_\_, filed with the demand

pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_

 the sequence listing part of the description:

pages \_\_\_\_\_, as originally filed

pages \_\_\_\_\_, filed with the demand

pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_

**2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.**

These elements were available or furnished to this Authority in the following language \_\_\_\_\_ which is:

 the language of a translation furnished for the purposes of international search (under Rule 23.1(b)). the language of publication of the international application (under Rule 48.3(b)). the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).**3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:** contained in the international application in written form. filed together with the international application in computer readable form. furnished subsequently to this Authority in written form. furnished subsequently to this Authority in computer readable form. The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished. The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.**4.  The amendments have resulted in the cancellation of:** the description, pages \_\_\_\_\_ the claims, Nos. \_\_\_\_\_ the drawings, sheet/fig \_\_\_\_\_**5.  This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2 (c)).\*\***

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item I and annexed to this report.

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE99/01964

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

Novelty (N)	Claims	<u>1-6</u>	YES
	Claims	_____	NO
Inventive step (IS)	Claims	<u>1-6</u>	YES
	Claims	_____	NO
Industrial applicability (IA)	Claims	<u>1-6</u>	YES
	Claims	_____	NO

**2. Citations and explanations (Rule 70.7)**

The claimed invention relates to a method and to an arrangement for the continuous production of lignocellulosic boards, wherein lignocellulosic material is disintegrated into particles and/or fibres, glued, dried and formed into a mat. The mat is compressed in a continuous steam-injection press into board form and then passed through an after-conditioning unit. Gaseous emissions and steam occurrent in the press process are captured. Hot air is supplied to prevent condensation of the gaseous emissions and the steam when leakage air from the surroundings is admixed therewith and also to transport the steam and emissions to a combustion plant for combustion.

SE 502272 C2 (incorrectly named A in the international search report, corresponding to WO 9520473 A1) discloses a method of continuous manufacture of board from lignocellulosic fiber material using steam-injection pressing as above. However, capturing of gaseous emissions and steam occurrent in the press process are not disclosed. The document is therefore only a background art document.

Consequently, the invention is novel, is considered to involve an inventive step and to be industrially applicable.